

FREEZE BLOCK™ VALVE FAQ



SPECIFICATIONS

FLUID COIL VALVES

- Temperature - 39-35° F
- Pressure - 200 psi

STEAM COIL VALVES

- Temperature - 83° F



SAE-7 Straight Thread with O-Ring Seat


Mesh Screen Incorporated for Large Particles

INSTALLATION INFORMATION

No pipe dope or teflon tape is required for installation.

Thread the valve all the way down until the valve body meets the brass adapter. Do NOT apply more than 10lbs of torque on the valve once tightened.

Use a 'hold-back' wrench on the adapter during removal and installation of the valve.

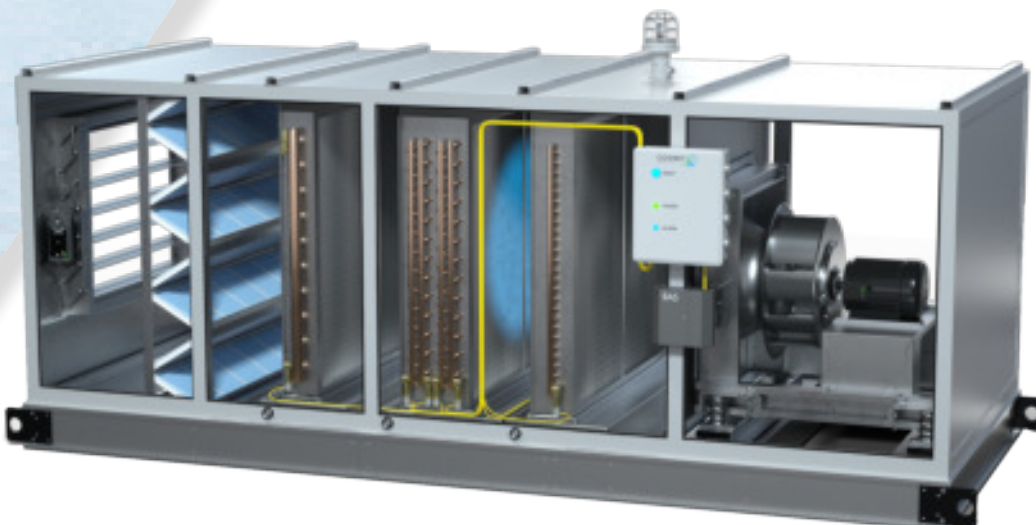

**MORE INFO
AVAILABLE AT
COONEYENGINEEREDSOLUTIONS.COM**